


版本号：V1.1  
材质：80克书写纸+双面单黑+对折 尺寸：280\*120mm  
最后成品尺寸：140\*120mm 红线框不需要印刷

Operating Instructions

CONNECTING AND OPERATING

- 1) Connect the HDMI input source (such as HD-DVD/ PS3 /STB etc.)into transmitter.
  - 2) Connect one CAT-5E or CAT6 cable to both the output of transmitter and input of receiver.
  - 3) Connect the HDMI display (such as: HD-LCD/HD-DLP) into receiver.
  - 4) Connect the IR TX cable into "IR TX" of the transmitter; Connect the IR RX cable into "IR RX" of the receiver.
- NOTE: Insert/Extract cables gently.

Typical Application

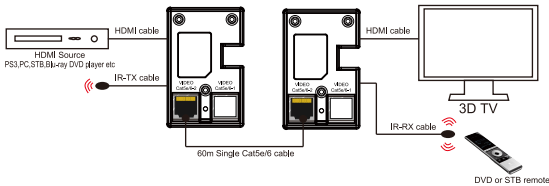

MAINTENANCE

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner or benzine to clean this unit.

PRODUCT SERVICE

- 1) **Damage requiring service:**  
The unit should be serviced by qualified service personnel if:  
(a) The DC power supply cord or AC adaptor has been damaged;  
(b) Objects or liquids have gotten into the unit;  
(c) The unit has been exposed to rain;  
(d) The unit does not operate normally or exhibits a marked change in performance;  
(e) The unit has been dropped or the cabinet damaged.
- 2) **Servicing Personnel:** Do not attempt to service the unit beyond that described in these operating instructions.  
Refer all other servicing to authorized servicing personnel.
- 3) **Replacement parts:** When parts need replacing ensure the servicer uses parts specified by the manufacturer or parts that have the same characteristics as the original parts. Unauthorized substitutes may result in fire, electric shock, or other hazards.
- 4) **Safety check:** After repairs or service, ask the servicer to perform safety checks to confirm that the unit is in proper working condition.


WARRANTY

If your product does not work properly because of a defect in materials or workmanship, our Company (referred to as "the warrantor" ) will , for the length of the period indicated as below, (Parts(2)Year ,Labor(90) Days) which starts with the date of original purchase ("Limited Warranty period"), at its option either(a) repair your product with new or refurbished parts, or (b) replace it with a new of a refurbished product. The decision to repair or replace will be made by the warrantor.

Operating Instructions

60m HDMI wall Plate Extender over single cat5e/6, Support 3D, with IR

Operating Instructions

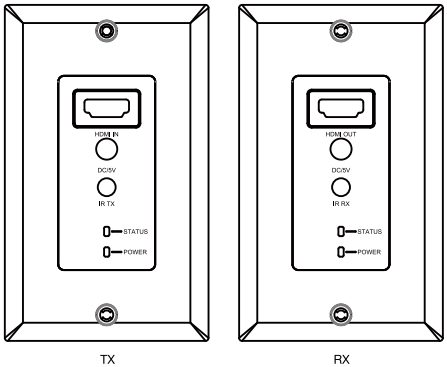

Dear Customer

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

FEATURES

- Each set includes one transmitter and one receiver.
- Following North American wall plate standard.
- Use single UTP cable (Cat5e/6) to substitute HDMI cable to achieve long distance transmission, the UTP Cable follows the standard of IEEE-568B.
- Transmission distance reaches up to 60 meters under the video format of 1080P.
- Signaling rates up to 2.25Gbits in support of 1080P display.
- With IR control to the source.
- Support 3D video format

NOTICE

Our company reserve the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.

版本号：V1.1  
材质：80克书写纸+双面单黑+对折 尺寸：280\*120mm  
最后成品尺寸：140\*120mm 红线框不需要印刷

Operating Instructions

TABLE OF CONTENTS

- Specifications
- Package Contents
- Panel Descriptions
- Connecting and Operating
- Typical Application
- Maintenance
- Product Service
- Warranty

SPECIFICATIONS

Operating Temperature Range	-5 to +35℃ (+23 to +95°F)
Operating Humidity Range	5 to 90%RH (No Condensation)
Input Video Signal	0.5-1.0 Volts P-P
Input DDC Signal	5 volts p-p(TTL)
Support Video Format	DTV/HDTV:480i/576i/480P/576P/720P/1080i/1080P 3D video format
Video Output	HDMI
Support Audio Format	DTS-HD Master Audio、Dolby true-HD etc.
Transmission Distance	1080P 8-bit 60m(Maximum); over CAT5E/CAT6 /24AWG/Solid(recommend to use 23AWG Cat6 cable)
Power consumption	3watts(Maximum)
Dimension (L×W×H)	115x70x35mm
IR wavelengh &frequency	Wavelength:940nm,frequency 38kHz
Net Weight	260g(Pair)

Note1: Specifications are subject to change without notice. Mass and dimensions are pproximate.

PACKING CONTENTS

- 1) Main Unit, HDMI Wall Plate Extender
- 2) Operating Instructions
- 3) IR TX cable
- 4) IR RX cable
- 5) Power adapter DC 5V 1A x2PCS

Operating Instructions

PANEL DESCRIPTIONS

